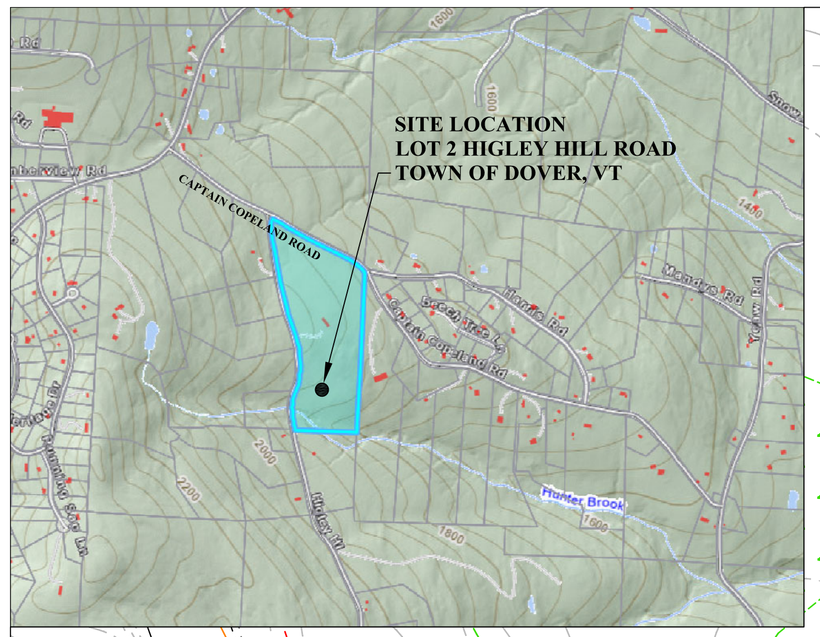


AREA FOUND SUITABLE FOR A MOUND, ON-SITE WASTEWATER DISPOSAL SYSTEM FOR EXISTING 2-BEDROOM, SINGLE-FAMILY RESIDENCE DO NOT DISTURB THIS AREA

AREA FOUND SUITABLE FOR ON-SITE REPLACEMENT WASTEWATER DISPOSAL SYSTEM

TP 2

PRESUMED ISOLATION ZONE FOR PROPOSED ON-SITE WASTEWATER DISPOSAL SYSTEM

EXISTING BARN

EXISTING OUT BUILDING

100' MIN.

EXISTING ENCLOSURE FOR EXISTING FILTRATION, DISINFECTION, AND WATER STORAGE TANK, RECEIVING ROOF RUNOFF FOR WATER SOURCE. NOT KNOWN TO BE IN THE STATE OF FAILURE

EXISTING 2-BEDROOM, SINGLE-FAMILY RESIDENCE 25 HIGLEY HILL ROAD

#25

PRESUMED CLASS III WETLAND

PROPOSED DRILLED BEDROCK WELL REPLACEMENT AREA

EXISTING 1500 GALLON DUAL COMPARTMENT SEPTIC TANK / PUMP CHAMBER

100' MIN.

NO WASTEWATER DISPOSAL SYSTEMS EXISTING OR PROPOSED LOCATED WITHIN PROPOSED WELLSHIELD

PRESUMED ISOLATION ZONE FOR PROPOSED POTABLE WATER SUPPLY (DRILLED WELL)

EXISTING DRIVEWAY

HIGLEY HILL ROAD

LOT 1

200' MIN.

EXISTING AT-GRADE ON-SITE WASTEWATER DISPOSAL SYSTEM. NOT KNOWN TO BE IN THE STATE OF FAILURE

PROPOSED PROPERTY LINE

PROPOSED DRIVEWAY

PROPOSED 4-BEDROOM, SINGLE-FAMILY RESIDENCE

CONTRACTOR AND OWNER MUST COORDINATE GRADES ON BUILDING AND SEWER, FROM FOUNDATION TO D-BOX. FAILURE TO DO SO COULD REQUIRE A REDESIGN, PERMIT AMENDMENT, AND/OR A PUMP CHAMBER

LOT 2

50' APPROXIMATE WETLAND BUFFER ZONE

PROVIDE SURFACE DRAINAGE UPSLOPE AND AROUND BOTH SIDES OF MOUND SYSTEM

100' MIN.

PROPOSED SYSTEM VENT (SEE DETAILS)

TP 4

TP 3

TP 5

DO NOT DISTURB

FINISHED GRADE AT HIGHEST CORNERS ELEVATION 1961.94

FINISHED GRADE AT LOWEST CORNERS ELEVATION 1960.23

MOW MOUND SYSTEM ANNUALLY, AT A MINIMUM

LIMITS OF 'PLOWING' LIMITS OF SAND FILL

DO NOT DISTURB 25' DOWNHILL TOE OF MOUND SYSTEM

PROPOSED 1500 GALLON PRECAST SEPTIC TANK WITH EFFLUENT TEE FILTER (SEE DETAIL)

PRESUMED CLASS II WETLAND

PERMITTED DRILLED BEDROCK WELL (SEE DETAIL)

50' SETBACK TO ANY WASTEWATER TANK AND/OR SEWER COLLECTION LINE

TBM NAIL AT BASE OF 24" HARDWOOD TREE ELEVATION 1954.33

PROPOSED PROPERTY LINE

PRESUMED ISOLATION ZONE FOR PROPOSED ON-SITE WASTEWATER DISPOSAL SYSTEM

100' MIN.

NO WASTEWATER DISPOSAL SYSTEMS EXISTING OR PROPOSED LOCATED WITHIN PROPOSED WELLSHIELD

50' APPROXIMATE WETLAND BUFFER ZONE

PRESUMED ISOLATION ZONE FOR PROPOSED POTABLE WATER SUPPLY (DRILLED WELL)

200' MIN.

1960 1950 1940 1930

NORTH
VERMONT STATE PLANE

30 0 15 30

1 INCH = 30 FT.

KEY

- PROPOSED FEATURES
- EXISTING CONTOURS
- ZONING SETBACK
- APPROX. PROPERTY LINE
- W — WATER LINE
- OHE — OVERHEAD ELECTRIC LINE
- SURFACE WATER SWALE
- STONE WALL
- APPROX. EDGE OF WOODS
- UTILITY POLE
- IRON PIN FOUND
- TEST PIT (STAKED IN FIELD)
- AREA OF ABUTTING LOT OVERSHADOWED BY ISOLATION DISTANCES

MINIMUM SETBACK DISTANCES TO DISPOSAL FIELDS, TANKS, AND SEWER LINES

	DISPOSAL FIELD	SEPTIC TANK	SEWER LINE
LAKE AND POND (SURFACE WATER)	50'	25'	25'
RIVERS AND STREAMS	50'	25'	10'
DRAINAGE SWALES, DITCHES	25'	N/A	N/A
MAIN OR MUNICIPLE WATER LINES	50'	50'	N/A
SERVICE WATER LINES (PRESSURE)	25'	25'	10'
SERVICE WATER LINES (SUCTION)	100'	50'	10'
ROADWAYS, DRIVES, PARKING LOTS	10'	5'	N/A
TOP OF SLOPE, OR SLOPE > 30%	25'	10'	N/A
PROPERTY LINES	25'	10'	10'
TREES	10'	10'	10'
OTHER DISPOSAL FIELD – SIDE	10'	N/A	N/A
OTHER DISPOSAL FIELD – DOWNHILL	25'	10'	N/A
FOUNDATION DRAIN (ABOVE)	20'	10'	N/A
CURTAIN DRAIN (ABOVE)	35'	10'	N/A
FOUNDATION & CURTAIN DRAIN – DOWNHILL	75'	N/A	N/A
SEPTIC & PUMP CHAMBER – DOWNHILL	25' MEASURED TO LIMITS OF FILL MATERIAL		
SEPTIC & PUMP CHAMBER – ALL OTHER DIRECTIONS	10' MEASURED TO LIMITS OF FILL MATERIAL		

NOTE: REFER TO ENVIRONMENTAL PROTECTION RULES, CHAPTER 1, TABLE 9-2 FOR ADDITIONAL SETBACK REQUIREMENTS.

MINIMUM SETBACKS TO NEW WATER SUPPLY

	DRILLED WELL	SHALLOW WELL
ROAD	25'	25'
DRIVEWAY	5'	10'
DOWNGRADIENT SEPTIC	100'	150'
UPGRADIENT SEPTIC	200'	500'
WASTEWATER TANK	50'	75'
PROPERTY LINE	10'	10'
BUILDING	5'	5'
SEWER LINE	50'	75'

PROPOSED RESIDENCE, WELL, AND MOUND SYSTEM ARE LOCATED ON LOT 2, HIGLEY HILL ROAD AND TO BE LISTED IN BOOK 401, PAGE 149 IN THE TOWN OF DOVER LAND RECORDS.

EXISTING LOT SIZE IS ±12.58 ACRES. LOT REQUIRES VT DEC WASTEWATER PERMIT AMENDMENT TO WW-2-7902.

DESIGN CERTIFICATION:

I HEREBY CERTIFY THAT, IN THE EXERCISE OF MY REASONABLE PROFESSIONAL JUDGMENT, THE DESIGN RELATED INFORMATION SUBMITTED WITH THIS APPLICATION IS TRUE AND CORRECT AND THE DESIGN INCLUDED IN THIS APPLICATION FOR A PERMIT COMPLIES WITH THE VERMONT WASTEWATER SYSTEM AND POTABLE WATER SUPPLY RULES.

POTABLE WATER SUPPLY LEAKAGE AND PRESSURE TESTING:

(A) WATER SERVICE LINES AND WATER SERVICE PIPES SHALL BE PRESSURE TESTED AND LEAKAGE TESTED ACCORDING TO ONE OF THE FOLLOWING PROCEDURES PRIOR TO PLACING THE POTABLE WATER SUPPLY INTO SERVICE:
- (1) VERMONT PLUMBING RULES;
- (2) THE AWWA; OR
- (3) BY PRESSURIZING THE LINES AND PIPES WITH WATER AT THE WORKING PRESSURE OF THE SYSTEM OR GREATER AND HOLD WITHOUT A DROP IN PRESSURE FOR A MINIMUM OF 16 MINUTES.

(B) ATMOSPHERIC STORAGE STRUCTURES SHALL BE LEAKAGE TESTED ACCORDING TO THE FOLLOWING PROCEDURE TO ENSURE WATER LOSS IS EQUAL TO OR LESS THAN 0.05 OF 1 PERCENT OF THE TANK CAPACITY PRIOR TO PLACING THE STRUCTURE INTO SERVICE:
- (1) FILLING THE TANK WITH POTABLE WATER AND LET STAND FOR 24 HOURS; AND
- (2) MEASURING THE LOSS OF WATER OVER 24 HOURS.

(C) IF THE WATER SERVICE LINE, WATER SERVICE PIPE, OR ATMOSPHERIC STORAGE STRUCTURE FAILS THE PRESSURE OR LEAKAGE TEST, THE CAUSE OF THE FAILURE SHALL BE REPAIRED, AND THE LINE, PIPE, OR STRUCTURE RETESTED.

WELL WATER QUALITY TESTING REQUIREMENTS:

(A) THE POTABLE WATER SOURCE SHALL BE SAMPLED FOR THE FOLLOWING SUBSTANCES, AND ANY WATER TREATMENT SYSTEM REQUIRED PURSUANT TO SUBSECTION (D) INSTALLED, PRIOR TO ANY WATER USE AUTHORIZED IN THE PERMIT:
- (1) EACH PRIMARY AND SECONDARY CONTAMINANT LISTED IN TABLES 11-5 AND 11-6 OF THE ENVIRONMENTAL PROTECTION RULES, CHAPTER 1, WASTEWATER SYSTEM AND POTABLE WATER SUPPLY RULES, EFFECTIVE APRIL 12, 2019; AND
- (2) ANY SUBSTANCE WITH A GROUNDWATER ENFORCEMENT STANDARD IN THE GROUNDWATER PROTECTION RULE AND STRATEGY THAT THE SECRETARY DETERMINES MAY BE PRESENT IN THE SOURCE.


WATER LINE DISINFECTION PROCEDURE:

(A) A POTABLE WATER SUPPLY SHALL BE DISINFECTED PURSUANT TO THE REQUIREMENTS OF SUBSECTION 1-1210, ENVIRONMENTAL PROTECTION RULES, A SUMMARY OF WHICH IS PROVIDED BELOW, PRIOR TO PLACING THE POTABLE WATER SUPPLY IN SERVICE.
- (1) FLUSH THE POTABLE WATER SUPPLY UNTIL THE WATER RUNS CLEAR;
- (2) PROVIDE AN INITIAL DOSAGE OF AT LEAST 100 MG/L OF CHLORINE IN THE POTABLE WATER SOURCE;
- (3) CIRCULATE THE WATER IN THE POTABLE WATER SOURCE; AND
- (4) ALLOW THE WATER TO REST IN THE POTABLE WATER SOURCE FOR A MINIMUM OF 12 TO 24 HOURS BEFORE DISPOSING OF THE CHLORINATED WATER.

(C) DISINFECTION OF WATER SERVICE LINES AND WATER SERVICE PIPES SHALL BE COMPLETED PURSUANT TO THE REQUIREMENTS OF THE VERMONT PLUMBING RULES OR THE FOLLOWING METHOD:
- (1) FILL THE WATER SERVICE LINE OR WATER SERVICE PIPE WITH A WATER/CHLORINE SOLUTION OF 100 MG/L; AND (2) ALLOW THE CHLORINATED WATER TO REST IN THE WATER SERVICE LINE OR WATER SERVICE PIPE FOR A MINIMUM OF 24 HOURS BEFORE DISPOSING OF THE CHLORINATED WATER.


(D) DISINFECTION OF WATER STORAGE TANKS SHALL BE COMPLETED PURSUANT TO AWWA STANDARD C652.

(E) CHLORINATED WATER USED TO DISINFECT OR RESULTING FROM DISINFECTION OF POTABLE WATER SUPPLIES SHALL NOT BE DISCHARGED TO A WASTEWATER SYSTEM OR TO SURFACE WATER. PROPER DISPOSAL OF THE CHLORINATED WATER IS TO THE GROUND SURFACE THROUGH SHEET FLOW THAT INFILTRATES INTO THE SOIL OR DISPOSAL TO A WASTEWATER TREATMENT FACILITY, IF AUTHORIZED BY THE WASTEWATER TREATMENT FACILITY.

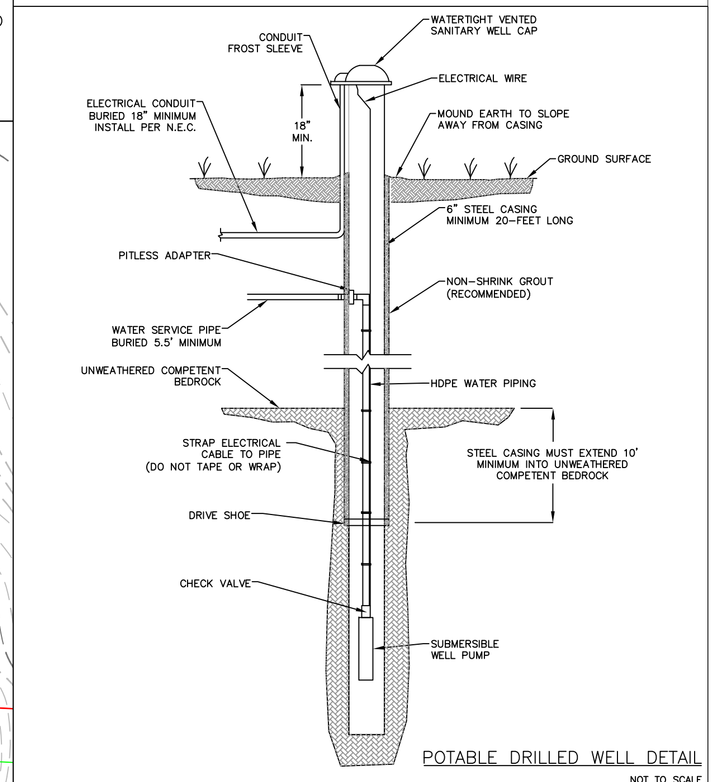

POTABLE DRILLED WELL DETAIL

NOT TO SCALE

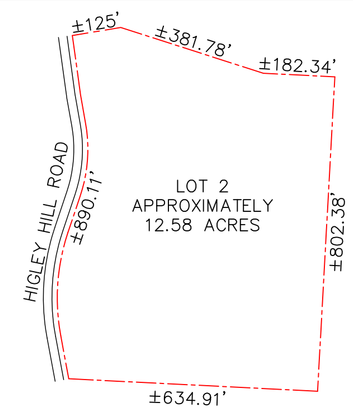

PROPERTY LINE DETAIL

NOT TO SCALE

NOTES:

1) THE PROPERTY LINE, EASEMENT, AND OTHER REAL PROPERTY DESCRIPTIONS PROVIDED IN THIS PERMIT APPLICATION ARE FOR THE USE OF THE ANR ONLY. THEY DO NOT DEFINE LEGAL RIGHTS OR MEET LEGAL REQUIREMENTS FOR A LAND SURVEY AS DESCRIBED IN 26 V.S.A. § 2502(4), AND SHALL NOT BE USED IN LIEU OF A SURVEY AS THE BASIS OF ANY LAND TRANSFER OR ESTABLISHMENT OF ANY PROPERTY RIGHT.

2) PROPERTY LINES WERE DERIVED FROM INFORMATION PROVIDED BY OWNER, FIELD EVIDENCE, COPY OF DEED, AND PRELIMINARY MAP ENTITLED "SUBDIVISION PLAN PREPARED FOR PETER W. EGGEN, 25 HIGLEY HILL ROAD, PARCEL NO. CP021, DOVER, VERMONT," DATED 12/6/2024 BY BENJAMIN A. JOYCE, PLS.

3) PLEASE SEE ATTACHMENTS FOR COMPLETE SOILS INFORMATION.

4) WETLANDS SHOWN ARE BASED ON 2024 NWI DATA, AND CONFIRMED VISUALLY IN THE FIELD IN THE FALL OF 2024.

TRINITY ENGINEERING
TECHNICAL SERVICES, LLC
26 UNION STREET, SUITE 1D
NORTH ADAMS, MA 01247
(413) 398-3211 & (802) 694-1919

COPYRIGHT © TRINITY - ALL RIGHTS RESERVED.
ALL MATERIAL CONTAINED WITHIN IS PROPERTY OF TRINITY, AND NOT TO BE REPRODUCED WITHOUT WRITTEN PERMISSION

REV. NO.	DATE	DESCRIPTION	BY
2	7/16/26	AMEND LOT 2 TO GRAVITY FLOW	J.E.D.
1	3/28/25	ORIGINAL SUBMISSION FOR PERMIT WW-2-7902	J.E.D.

STATE OF VERMONT CIVIL JOHN E. DUPRAS No. 7376 LICENSED PROFESSIONAL ENGINEER

DESIGNED BY: J.E.D.
DRAWN BY: G.J.V.
CHECKED BY: J.E.D.
SCALE: AS SHOWN

TITLE: WASTEWATER DISPOSAL SYSTEM AND POTABLE WATER SUPPLY DESIGN

PROJECT: PREPARED FOR DAVID OSTAFIN
PROPOSED LOT 2, HIGLEY HILL ROAD
TOWN OF DOVER, VERMONT

DATE: 7/16/2026

PROJECT NUMBER: 26096

SHEET NUMBER: C-1

SHEET: 1 OF 2